



## G-Motion 2T



Двутактова мототехника



Защита на детайлите от отлагания



Нискотемпературни свойства



Полусинтетично масло



Чистота на двигателя

### Description

### Advantages

### Application





### Physico-chemical characteristics

Indicator	Method	G-Motion 2T
Kinematic Viscosity at 100 °C, mm <sup>2</sup> /s	ASTM D 445	9.7
Flash Point (COC), °C	ГОСТ 12.1.044	344
Flash Point (COC), °C	ASTM D 92	182
Pour Point, °C	ГОСТ 20287	-38
Density at 20 °C, kg/m <sup>3</sup>	ASTM D 4052	865
Sulfated Ash, wt%	ASTM D 874	0.15

### Specifications

- ISO L-EGD
- JASO FD
- API TC

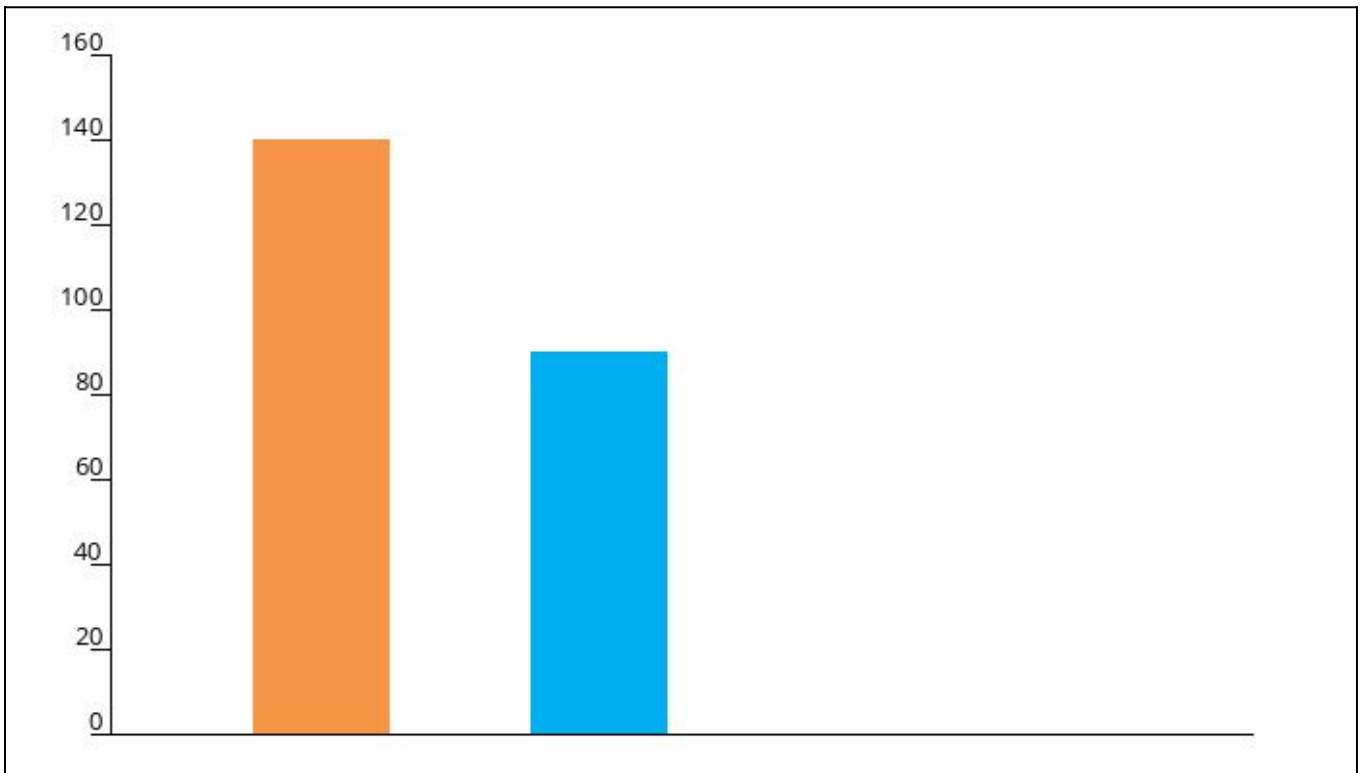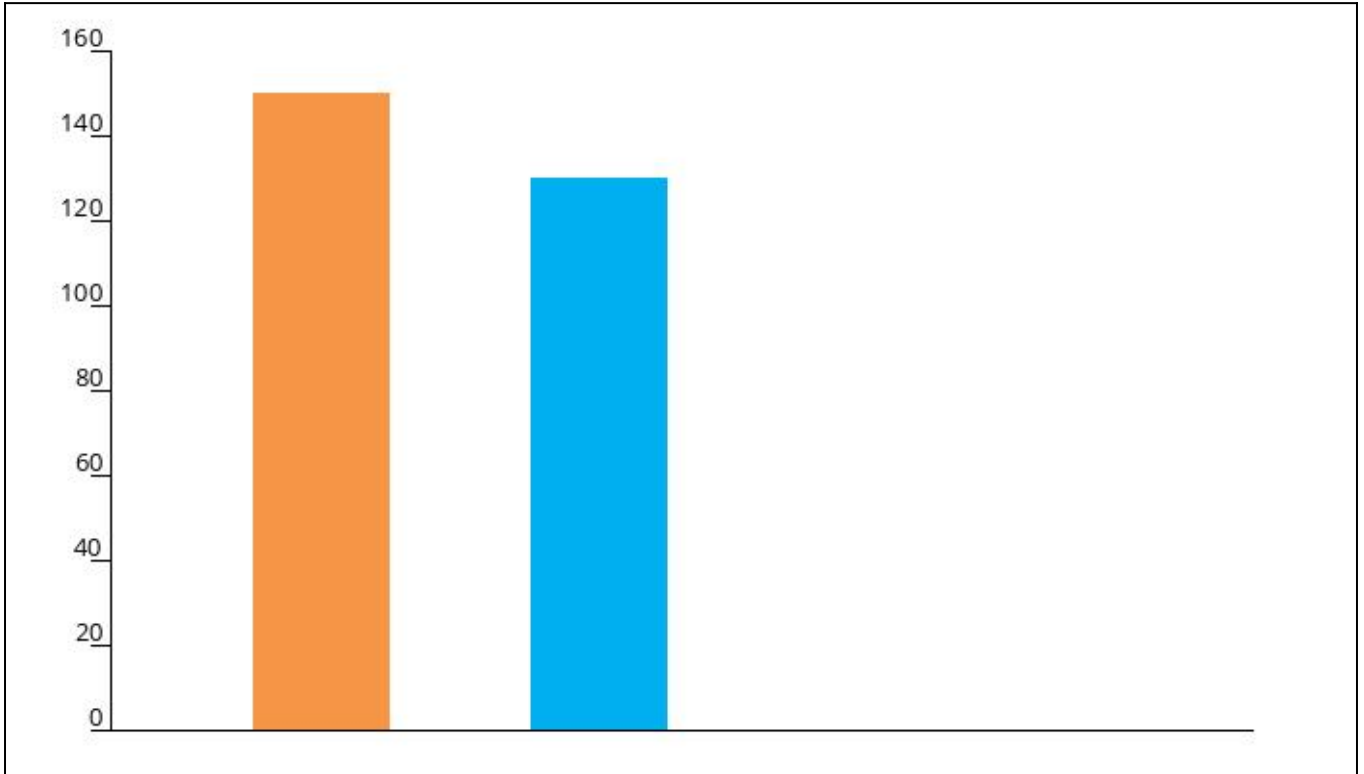

**The company's management system is certified in accordance with international standards**

ISO 9001



ISO 14001



ISO/TS 16949



OHSAS 18001



---

Gazpromneft — Lubricants Ltd.  
117218, Moscow, 14/3 Krzhizhanovski  
Str., Block A  
Tel: +7 (495) 642-99-69  
Fax: +7 (495) 921-48-63

The above data are typical for the current production. Due to continuous research and development, the information provided in the document may be changed.  
Information on the safe use of the product is contained in the Safety Data Sheet. You can get more detailed information from the technical specialists of the company.  
E-mail: [service@maslagaz.com](mailto:service@maslagaz.com) 01/2018